


## NKT couplings under GOST 633-80

Parameters of couplings for plain pipes manufactured by us				
Port area, mm	Outer diameter D, mm	Length L, mm	Thread	Mass, kg
40	56	96	NKT 48	0,5
50	73	110	NKT 60	1,3
62	89	132	NKT 73	2,4
76	108	146	NKT 89	3,6
89	120,6	150	NKT 102	4,5
100	132	156	NKT 114	5,1

Parameters of couplings for pipes with upset ends manufactured by us				
Port area, mm	Outer diameter D, mm	Length L, mm	Thread	Mass, kg
40	63,5	100	NKT B48	0,8
50	77,8	126	NKT B60	1,5
62	93,2	134	NKT B73	2,8
76	114,3	146	NKT B89	4,2
89	127	154	NKT B102	5
100	141,3	160	NKT B114	6,3

**\*Example of reference designation:**

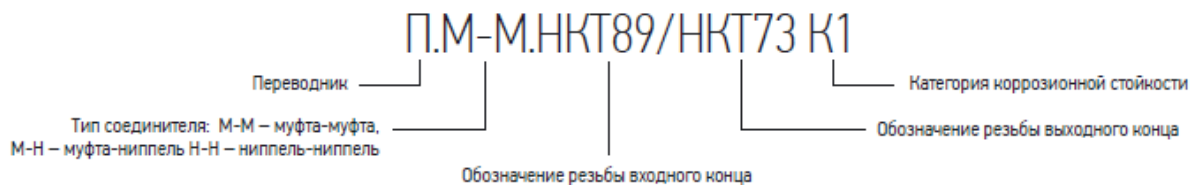

- П – Sub
- М-М – Connection type: М-М – coupling-to-coupling, М-Н – coupling-to-nipple, N-N – nipple-to-nipple
- NKT89 – Input end thread designation
- NKT73 – Output end thread designation
- K1 – Corrosion resistance category